



**HA0367**  
**LIFT TUBE MOUNT CANOPY POSTS**



MIDWEST IND.

ShoreLand® | ShoreStation® | ByronSELECT™

[www.shorestation.com](http://www.shorestation.com)

122 IA-175  
Ida Grove, IA 51445

0004805  
2025-08-06

## Table of Contents

Safety Definitions .....	3
Safety Instructions .....	3
Pre-Installation .....	4
Preparation .....	4
Assembly Instructions .....	5



### **WARNING**

**DO NOT INSTALL OR OPERATE A LIFT WITHOUT STUDYING THIS MANUAL AND INFORMATION INCLUDED WITH THE LIFT. FAILURE TO DO SO CAN LEAD TO IMPROPER INSTALLATION RESULTING IN SERIOUS PERSONAL INJURY AND/OR PRODUCT DAMAGE. IF YOU HAVE FURTHER QUESTIONS AFTER REVIEWING THIS INFORMATION, CONTACT YOUR SHORESTATION SALES REPRESENTATIVE.**



MIDWEST IND.

ShoreLand® | ShoreStation® | Byron<sup>SELECT</sup>™

[www.shorestation.com](http://www.shorestation.com)

## Safety Definitions

Safety messages are presented throughout this document and labels affixed to the product. The messages alert you to potential hazards to you and/or property. The signal words DANGER, WARNING, and CAUTION are preceded by an alert symbol  and communicate the severity of potential hazard. The severity of each type of message is defined as follows:

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

CAUTION, used with the safety alert symbol, indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

## Safety Instructions

Working with electrical equipment and installations over the water present many potential hazards to the installer. Every installation presents unique conditions that the installer should evaluate before installing or servicing the equipment. The following instructions must be followed, but may not encompass all potential hazards:

### **WARNING**

Never use this equipment to lift people. People must exit the boat prior to lifting it out of the water.

Never use this equipment to lift overhead. Install the platform so it remains at or below the dock level.

This equipment is designed to lift boats. Never use it to lift other items.

Do not allow children to operate or play on the equipment.

Do not install or use the lift if there are any signs of damage.

The wireless control system should only be operated if the operator has clear vision of the lift equipment and its surrounding location.

Never install or work on the equipment without first verifying that the A/C power supply (if present) is protected by a functioning Ground Fault Circuit Interrupt (GFCI) in accordance with National Electric Code section 210.8 and any additional local code requirements.

Review all operating instructions with the user(s) before allowing them to operate the lift. Disable the lift by disconnecting the battery power to the motor until you have an opportunity to train the user.

Disconnect all A/C power from the dock before installing or working on the equipment.

Do not exceed the recommended capacity of the equipment.

Do not modify the equipment unless you have received direct written approval from the manufacturer (ShoreStation).

Remove any metallic objects from your person before working with DC or AC electrical components.

Always wear proper personal protective equipment such as safety glasses, gloves, hardhats, and clothing.

Installation may require entering the water. Never enter the water without a proper personal floatation device. Disconnect any power to the lift and dock before entering the water.

Never work alone and observe safe lifting practices such as team lifting and proper lifting posture.



MIDWEST IND.



ShoreLander® | ShoreStation® | ByronSELECT™

[www.shorestation.com](http://www.shorestation.com)

# Pre-Installation Notes Concerning Your Lift

**NOTICE: A licensed & insured marine contractor must install and rate the pilings used for this lift. Permitting may be required from your local authority before construction of the lift. Consult a local marine contractor before purchasing and installing the piling system.**

**NOTICE: The boat should be positioned so the center of gravity is positioned as close to the middle of the lift as possible.**

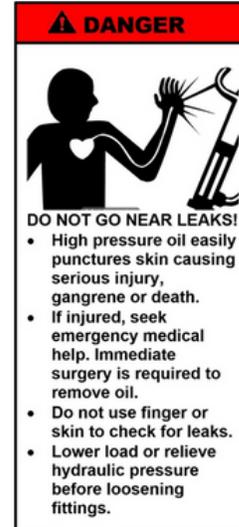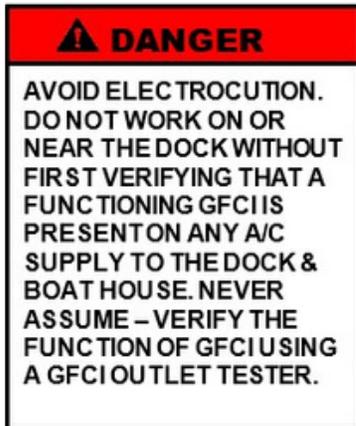

## Preparation

### Tools Required

Due to the variation in the design of boat slips, it is impossible to address all requirements. Be sure to survey the installation site and note any additional requirements.

Common tools required for installation include:

- 3/8 through 7/8 SAE wrenches
- 1/4 through 7/8 SAE ratcheting sockets and drives
- Cordless drill
- Banding cutters
- GFCI outlet tester
- Personal protective equipment (safety glasses, hard hats, gloves, etc.)



MIDWEST IND.

ShoreLand® | ShoreStation® | ByronSELECT™

[www.shorestation.com](http://www.shorestation.com)

# Assembly Instructions



**Gather and double check your parts and fasteners. You should have the following:**

7459316 CANOPY LIFT TUBE MOUNTING POSTS

73632 CANOPY LEG BUNDLE OFFSET

74594 HARDWARE BAG HA0367

1. Attach lift tube mounting posts to lift tube using provided hardware. Tighten Z-Brackets against lift tube C-Channel to secure. (SEE ILLUSTRATIONS)  
Brackets may face either way for a customized installation.

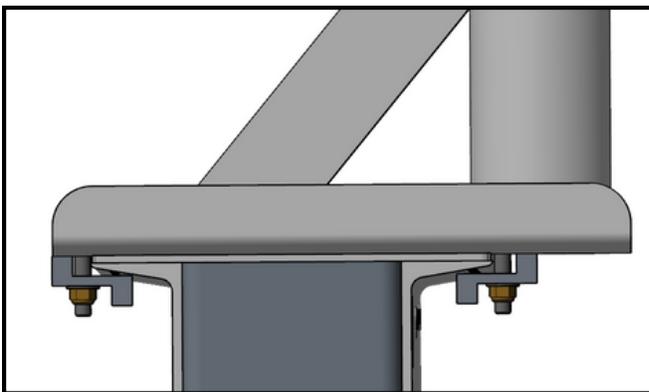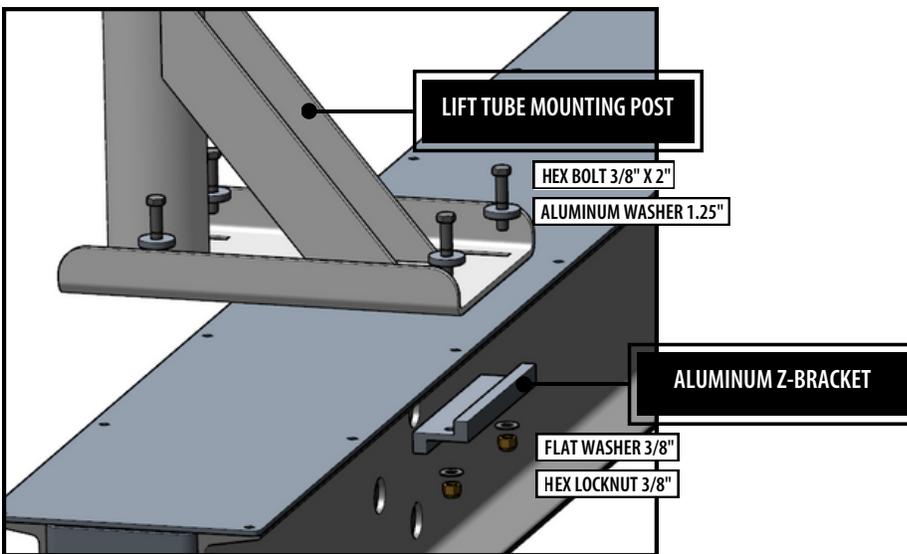

INSTALLATION NOTE: IF INSTALLING WITH A SHORESCREEN, MAKE SURE BRACKET PLACEMENT ON LIFT TUBES WILL NOT INTERFERE WITH PROPER SHORESCREEN OPERATION.




MIDWEST IND.


ShoreLandr® | ShoreStation® | ByronSELECT™

[www.shorestation.com](http://www.shorestation.com)

2. Secure the leg in place once position is determined using the top hole. You will need to drill a hole through the leg.

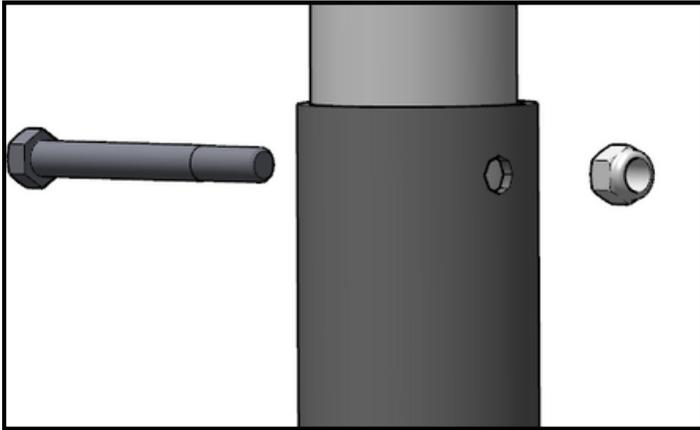

CANOPY HANGER BRACKETS AND INSTRUCTIONS ARE INCLUDED IN CANOPY FRAME BUNDLES.

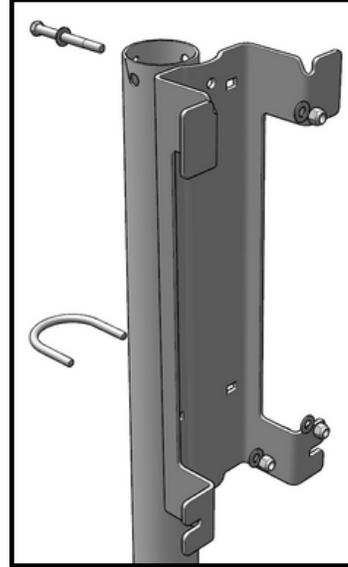

MIDWEST IND.

ShoreLand® | ShoreStation® | ByronSELECT™

[www.shorestation.com](http://www.shorestation.com)