




HA0316
LOADGUIDE POST 5.75"/8" TUBE FLAT 10FT

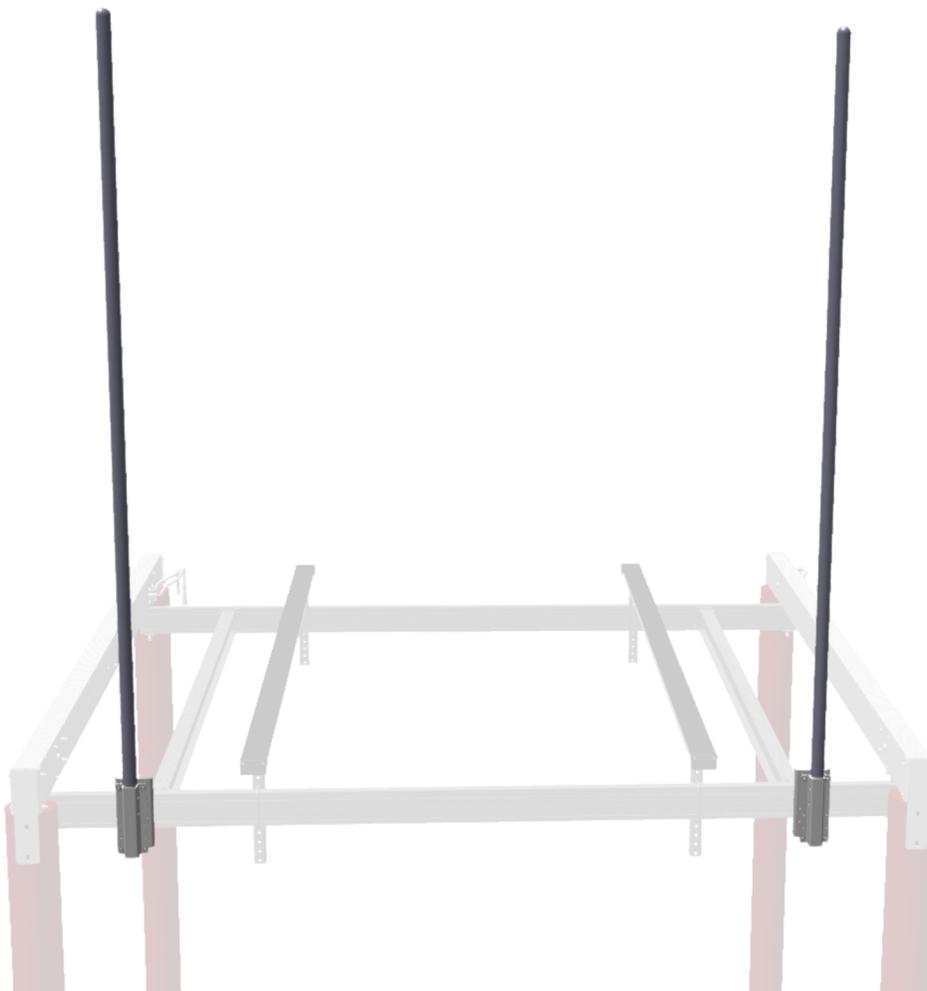

MIDWEST IND.

ShoreLand® | ShoreStation® | ByronSELECT™
www.shorestation.com

122 IA-175
Ida Grove, IA 51445

0004744
2023-08-13

Table of Contents

Safety Definitions2
Safety Instructions2 - 3
Preparation4
Assembly Instructions4 - 5



WARNING

DO NOT INSTALL OR OPERATE A THIS ACCESSORY WITHOUT FIRST STUDYING THIS MANUAL AND INFORMATION INCLUDED WITH THE LIFT. FAILURE TO DO SO CAN LEAD TO IMPROPER INSTALLATION RESULTING IN SERIOUS PERSONAL INJURY AND/OR PRODUCT DAMAGE. IF YOU HAVE FURTHER QUESTIONS AFTER REVIEWING THIS INFORMATION, CONTACT YOUR SHORESTATION SALES REPRESENTATIVE.

Safety Definitions

Safety messages are presented throughout this document and labels affixed to the product. The messages alert you to potential hazards to you and/or property. The signal words DANGER, WARNING, and CAUTION are preceded by an alert symbol and communicate the severity of potential hazard. The severity of each type of message is defined as follows:

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

Safety Instructions

Working with electrical equipment and installations over the water present many potential hazards to the installer. Every installation presents unique conditions that the installer should evaluate before installing or servicing the equipment. The following instructions must be followed, but may not encompass all potential hazards:



MIDWEST IND.

WARNING

Do not allow children to operate or play on the equipment.

Do not install if there are any signs of damage.

Never install or work on the equipment without first verifying that the A/C power supply (if present) is protected by a functioning Ground Fault Circuit Interrupt (GFCI) in accordance with National Electric Code section 210.8 and any additional local code requirements.

Review all operating instructions with the user(s) before installation.

Disconnect all A/C power from the dock before installing or working on the equipment.

Do not exceed the recommended capacity of the equipment.


Do not modify the equipment unless you have received direct written approval from the manufacturer (ShoreStation).

Remove any metallic objects from your person before working with DC or AC electrical components.

Always wear proper personal protective equipment such as safety glasses, gloves, hardhats, and clothing.

Installation may require entering the water. Never enter the water without a proper personal floatation device. Disconnect any power to the lift and dock before entering the water.

Never work alone and observe safe lifting practices such as team lifting and proper lifting posture.

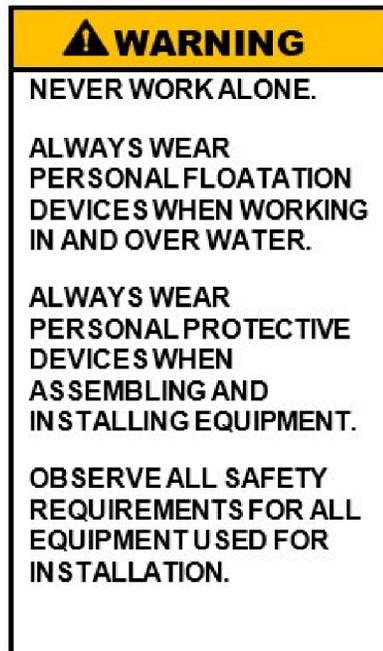

Preparation

Tools Required

Due to the variation in waterfront conditions, it is impossible to address all requirements. Be sure to survey the installation site and note any additional requirements.

Common tools required for installation include:

- 3/8 through 7/8 SAE wrenches
- 1/4 through 7/8 SAE ratcheting sockets and drives
- Cordless drill
- Banding cutters
- Personal protective equipment (safety glasses, hard hats, gloves, etc.)
- Tape Measure
- Level

Additional equipment may be required based on your installation site requirements.

Assembly Instructions

Gather and double check your parts and fasteners. You should have the following:

71593 - WMENT ALUM POST LOADGUIDE 120IN 10/20K PILING MOUNT (X 2)

71591 - CHANNEL LOADGUIDE BACKING PLATE (X2)

73888 - HDWE BAG HA0316 LOADGUIDE




STEP 1

Attach Brackets to Platform

Slide the hex head bolts through the brackets and around the cradle tube as shown. Brackets are positioned on the outside of the lift. Use a 9/16 wrench to start the bolts, but do not tighten.

NOTE: If installing on an 8K/10K cradle, use 4" bolts. If installing on a 6K cradle, use 3.5" bolts.

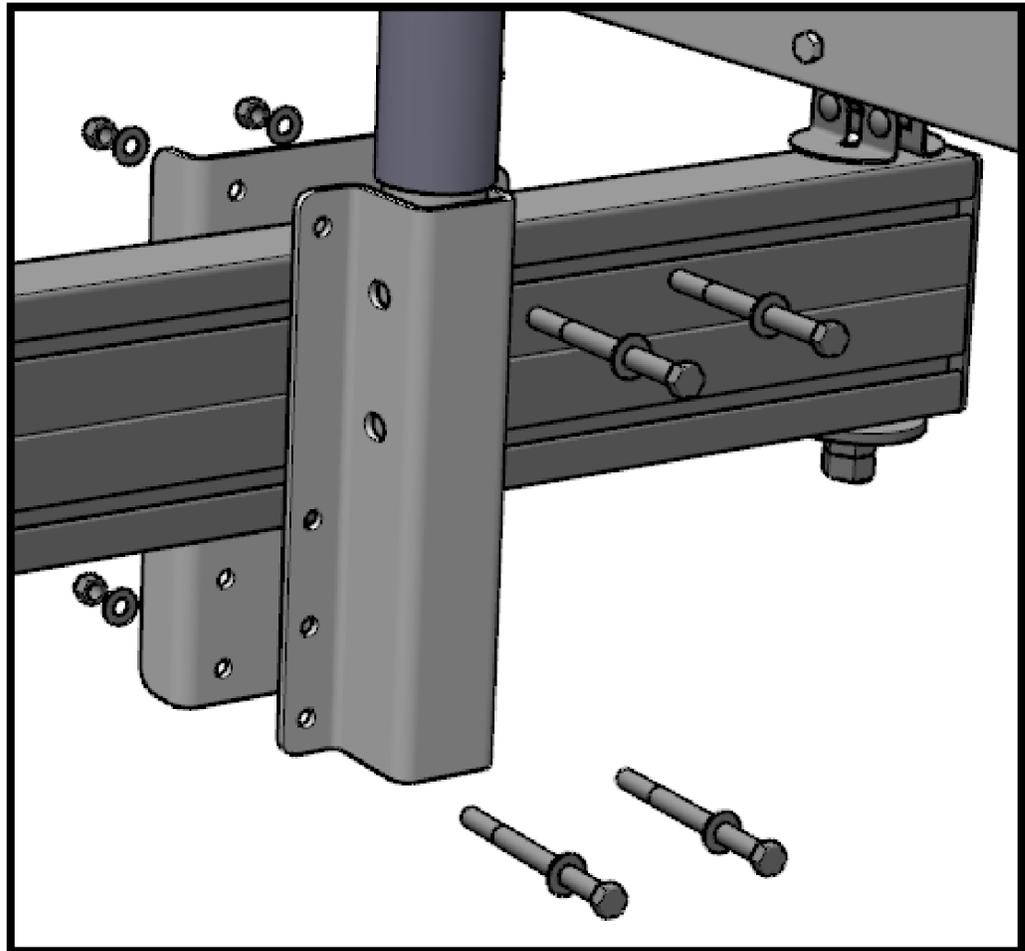

STEP 2

Adjust and Tighten

Adjust the loadguides to fit and center your boat. After everything is in sufficient position, tighten all hardware and load boat. Make adjustments as needed.



MIDWEST IND.

ShoreLand® | ShoreStation® | ByronSELECT™

www.shorestation.com

122 IA-175
Ida Grove, IA 51445

0004744
2023-08-13