



**\* DANGER - CAUTION \***

Always Lower The Boat Lift Before Attempting Assembly.

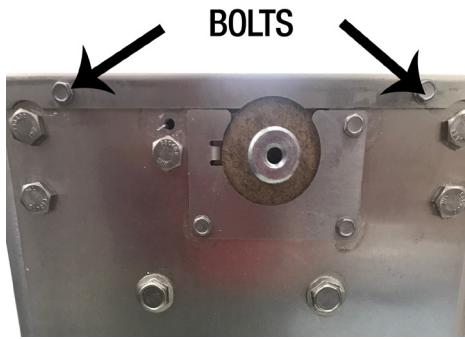


1. Lower the Boat Lift.
2. Remove the Wheel.
3. Remove the Top 2 Bolts. Take Cover Off.

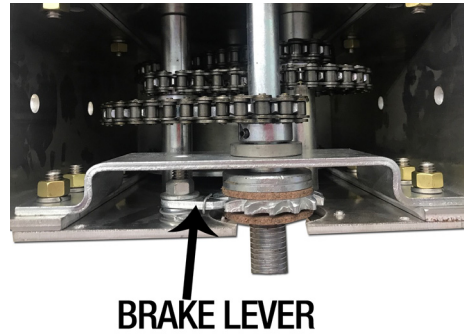

4. Remove the Brake Lever. You will not use the Brake Lever or Spring Holding it.



5. Install the Top Cover, Install the Spline & Spacer Collar as Shown.

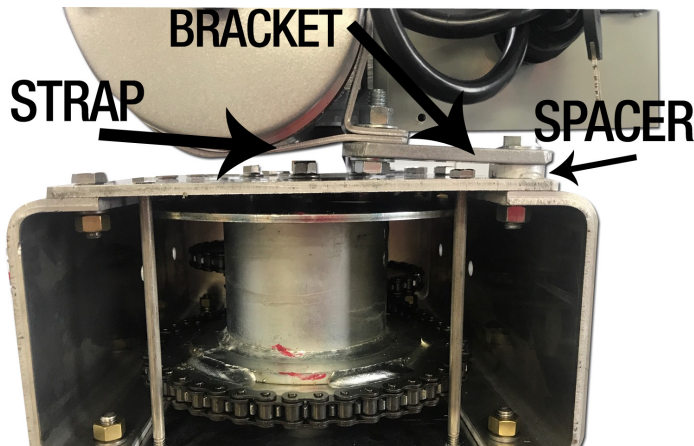


6. Install the Motor Strap and Bracket as Shown with Spacer. \*This Kit has a Longer Bracket than Shown in Picture.

In Case of a Power Outage This Tool May be Inserted Into a Drill to Raise or Lower Your Lift. First Remove Rubber Cap From the Motor Shaft.



7. Slide the Motor down onto the Spline. Install the Bolt & Washer onto the Motor and Tighten to Approximately 70 Foot Pounds.

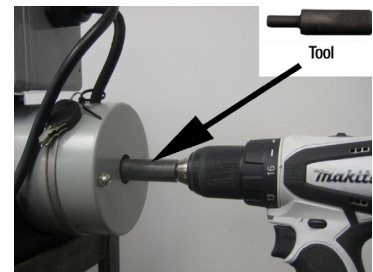

**Recommended Extension Cords up to 150 feet 12/3.**

Any Question Regarding Electrical Current Requirements Please Call Your Authorized Dealer or Lift Tech Marine 1-866-319-8877. [WWW.LIFTTECHMARINE.COM](http://WWW.LIFTTECHMARINE.COM)

**\* DANGER - CAUTION \***

**All Power Used on Your Dock or Lift Needs to be GFI Protected at the Shoreline.**