


Hydraulic Spec Sheet

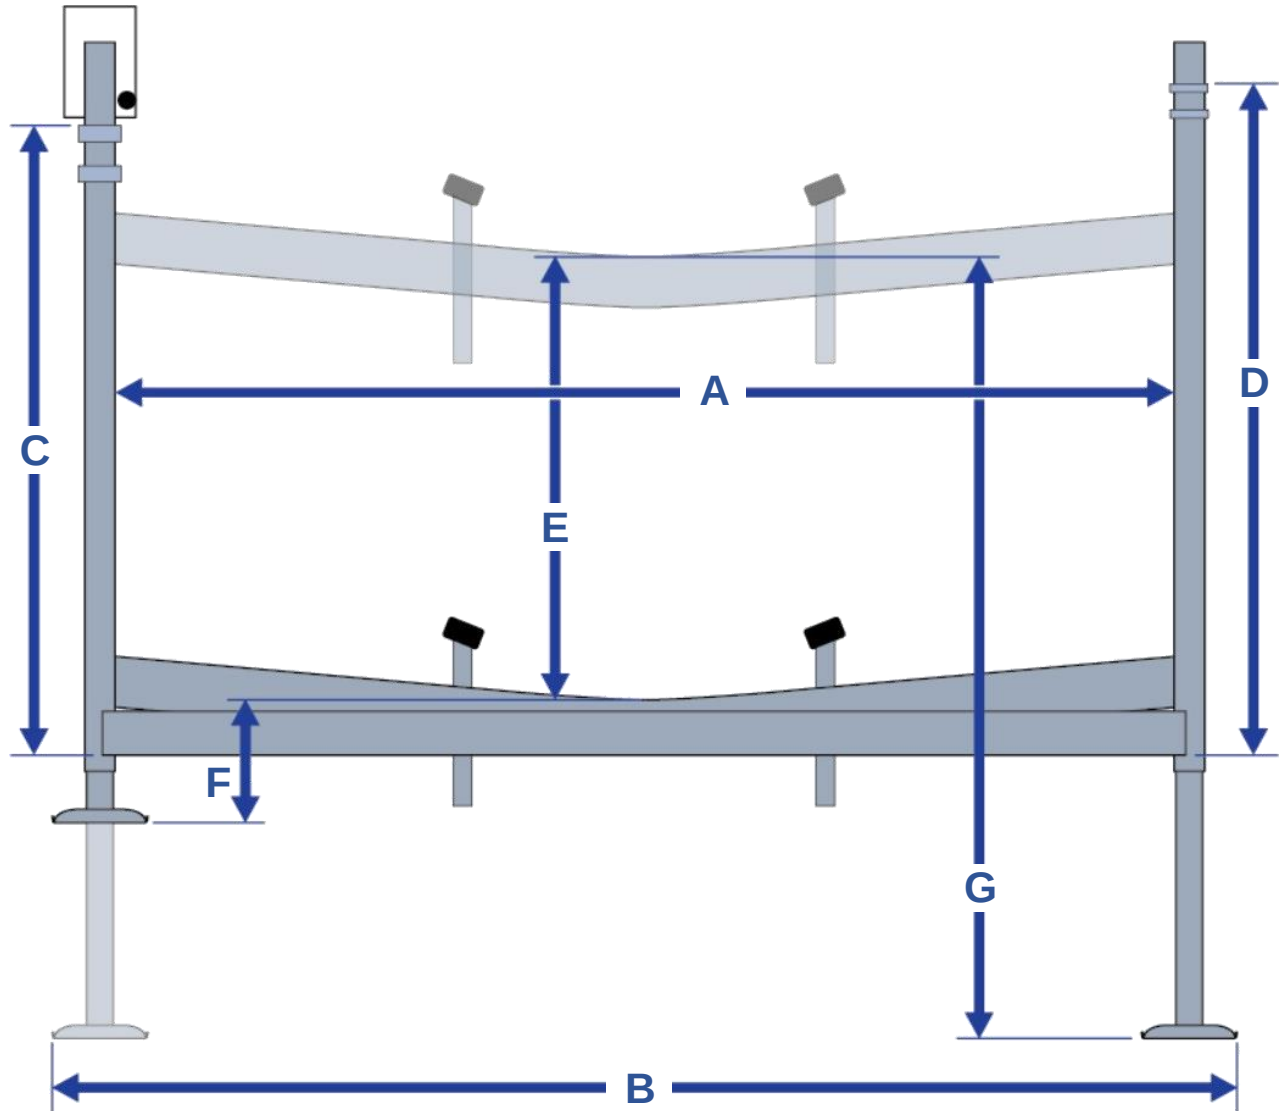

- The dimensions shown can vary up to 2 inches.
- To determine maximum water depth, refer to maximum platform height (G) and subtract the desired height off of the water when fully raised.
- To ensure the vessel can clear the lift platform when lowered, refer to the vessel's draft to the keel (or skags) and compare it to the lift travel (E) minus the desired height off the water and the amount of clearance required to safely float over the platform.
- Never install a lift in conditions that will require the vessel to power on to the lift due to inability to float over the platform and support components. Doing so can permanently damage the lift and/or vessel.
- **WARNING:** The XL extension leg (SS1230) is a 96" extension leg with a 3" outside diameter. It is designed for use on Deep Water lift models. When used on 1500 lb. thru 4000 lb. lifts it will fit more loosely inside the lift's corner posts and cause increased shifting and instability when fully extended.

	A Width Between Lift Legs	B Width Outside Foot Pads	C Lift Tube Height	D Dropside Tube Height	E Lift Travel	F Minimum Platform Height	G Maximum Platform Height	Platform Length (stern to bow)	Base Weight (pounds)
SSV1564HY	64	78	68	68	54	12	Standard = 86 SSKA = 106	80-1/8	264
SSV1564DHY	64	183-1/8	68	68	54	12	Standard = 86 SSKA = 106	80-1/8	615
SSV2088HY	88	103	66-3/4	66-3/4	48	12	Standard = 80 SSKA = 100 SS1230 = 138.25	118-5/8	323
SSV2088HYDW	88	103	66-3/4	66-3/4	48	12	Standard = 80 SSKA = 100 SS1230 = 138.25	118-5/8	353
SSV20100HY	100	115-1/8	66-3/4	66-3/4	48	12	Standard = 80 SSKA = 100 SS1230 = 138.25	118-5/8	338
SSV20100HYDW	100	115-1/8	66-3/4	66-3/4	48	12	Standard = 115 SS1230 = 138.25	118-5/8	371
SSV40108HY	108	123-1/8	67-3/4	68	48	12	Standard = 80 SSKA = 100 SS1230 = 138.25	118-1/4	424
SSV40108HYDW	108	123-1/8	67-3/4	68	48	12	Standard = 115 SS1230 = 138.25	118-1/4	464
SSV40120HY	120	135-1/8	67-3/4	68	48	12	Standard = 80 SSKA = 100 SS1230 = 138.25	118-1/4	433
SSV40120HYDW	120	135-1/8	67-3/4	68	48	12	Standard = 115 SS1230 = 138.25	118-1/4	473
SSV50108HY	108	123-1/8	71-1/2	75-1/2	48	12	Standard = 80 SSKA = 100 SS1230 = 138.25	130-7/8	514
SSV50108HYDW	108	123-1/8	71-1/2	75-1/2	48	12	Standard = 115 SS1230 = 138.25	130-7/8	544
SSV50120HY	120	135-1/8	71-1/2	75-1/2	48	12	Standard = 80 SSKA = 100 SS1230 = 138.25	130-7/8	524
SSV50120HYDW	120	135-1/8	71-1/2	75-1/2	48	12	Standard = 115 SS1230 = 138.25	130-7/8	554
SSV50120LHY	120	135-1/8	71-1/2	75-1/2	48	12	Standard = 80 SSKA = 100 SS1230 = 138.25	166-7/8	562
SSV50120LHYDW	120	135-1/8	71-1/2	75-1/2	48	12	Standard = 115 SS1230 = 138.25	166-7/8	592
SSV50132LHY	132	147-1/8	71-1/2	75-1/2	48	12	Standard = 86 SSKA-55 = 106 SS1230 = 144.25	166-7/8	537
SSV50132LHYDW	132	147-1/8	71-1/2	75-1/2	48	12	Standard = 121 SS1230 = 144.25	166-7/8	567

	A Width Between Lift Legs	B Width Outside Foot Pads	C Lift Tube Height	D Dropside Tube Height	E Lift Travel	F Minimum Platform Height	G Maximum Platform Height	Platform Length	Base Weight
SSV60108HY	108	123-1/8	80	75-1/2	54	12	Standard = 86 SSKA-55 = 106 SS1230 = 144.25	143-1/8	621
SSV60108HYDW	108	123-1/8	80	75-1/2	54	12	Standard = 121 SS1230 = 144.25	143-1/8	641
SSV60120HY	120	135-1/8	80	75-1/2	54	12	Standard = 86 SSKA-55 = 106 SS1230 = 144.25	143-1/8	631
SSV60120HYDW	120	135-1/8	80	75-1/2	54	12	Standard = 121 SS1230 = 144.25	143-1/8	651
SSV60120LHY	120	135-1/8	80	75-1/2	54	12	Standard = 86 SSKA-55 = 106 SS1230 = 144.25	167-1/8	613
SSV60120LHYDW	120	135-1/8	80	75-1/2	54	12	Standard = 121 SS1230 = 144.25	167-1/8	633
SSV60132HY	132	147-1/8	80	75-1/2	54	12	Standard = 86 SSKA-55 = 106 SS1230 = 144.25	143-1/8	644
SSV60132HYDW	132	147-1/8	80	75-1/2	54	12	Standard = 121 SS1230 = 144.25	143-1/8	664
SSV60132LHY	132	147-1/8	80	75-1/2	54	12	Standard = 86 SSKA-55 = 106 SS1230 = 144.25	166-7/8	628
SSV60132LHYDW	132	147-1/8	80	75-1/2	54	12	Standard = 121 SS1230 = 144.25	166-7/8	648
SSV70108HYDW	132	123-1/8	80	87	63	12	Standard = 127.5 SS1230 = 151.5	154-3/4	649
SSV70120HYDW	120	135-1/8	80	87	63	12	Standard = 127.5 SS1230 = 151.5	154-3/4	660
SSV70132HYDW	132	147-1/8	80	87	63	12	Standard = 127.5 SS1230 = 151.5	154-3/4	680
SSV80120HYDW	120	141-3/16	87	87	63	12	Standard = 140 SS1230 = 151.5	154-3/4	940
SSV80132HYDW	132	153-3/16	87	87	63	12	Standard = 140 SS1230 = 151.5	154-3/4	963
SSV100120HYDW	120	141-5/8	95	87	63	12	Standard = 140 SS1230 = 151.5	154-3/4	1098
SSV100132HYDW	132	153-5/8	95	87	63	12	Standard = 140 SS1230 = 151.5	154-3/4	1253
SSV100144HYDW	144	165-5/8	97	90-1/2	63	12	Standard = 140 SS1230 = 151.5	154-3/4	1343
SSV150144HYDW	144	165-5/8	109-1/4	102	70	19	Standard = 151.5 SS1230 = 163	184-5/8	1603