



LTPM608A Specifications

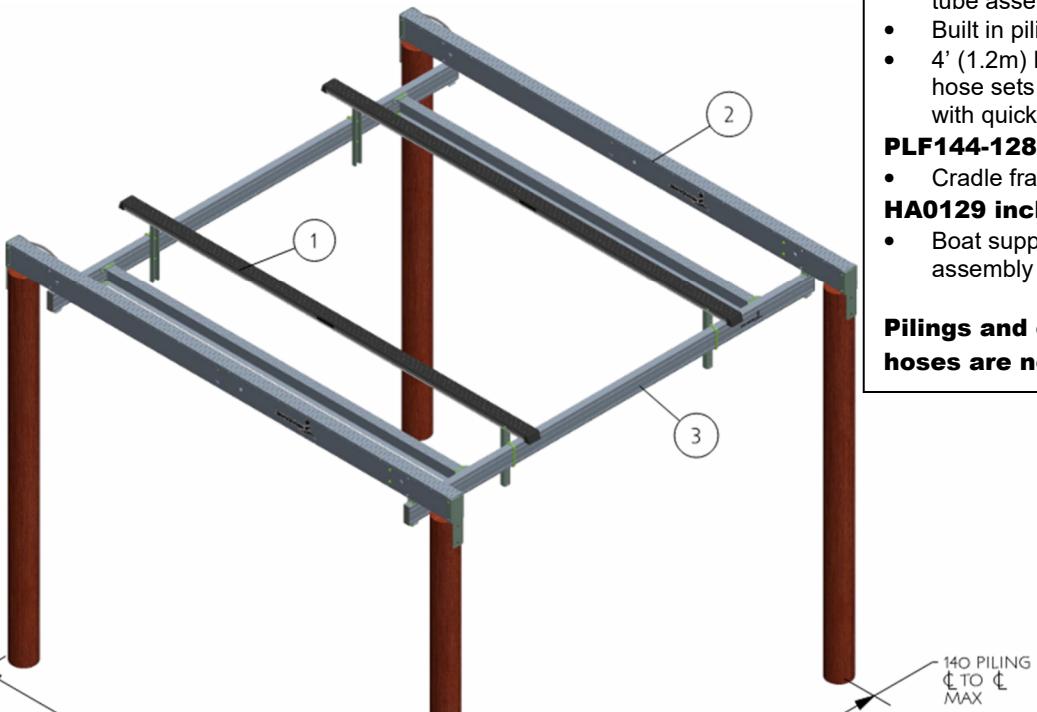

ITEM	PART #	DESCRIPTION	QTY
1	HAO129	BUNK POLY HYD V4000/6000 HOIST ALUM	1
2	LTPM608A	6K PILE MOUNT LIFT TUBES 8FT TRAVEL 128 INCH CABLE SPREAD TE	1
3	PLF144-128A	PLATFORM FLAT KIT OVERHEAD LIFT 144"W 128"L 6K MAX NO BNK TE	1

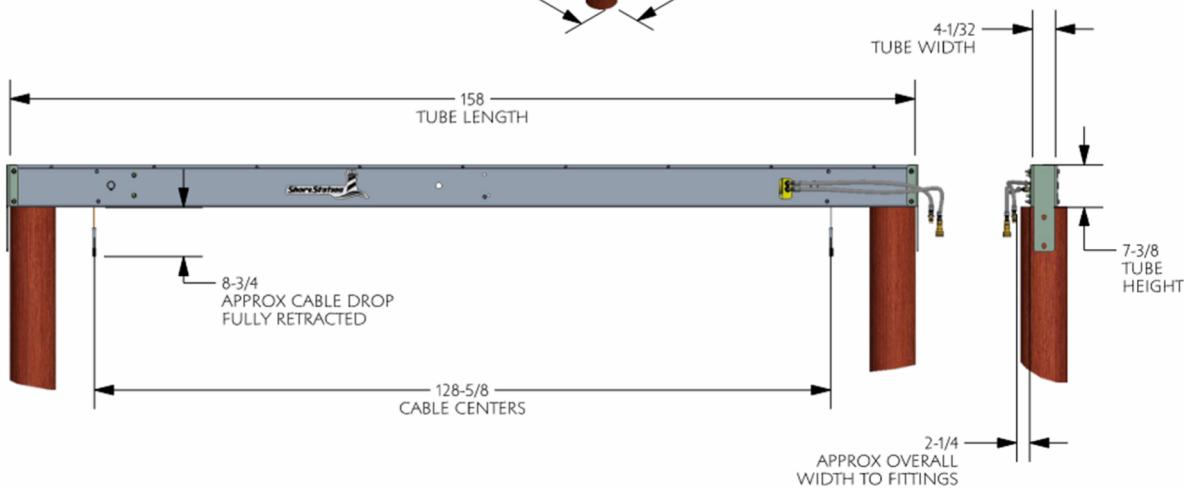

CAPACITY	6000 LBS (2722 KG)	LIFT TRAVEL	8 FT (2.4 M)
WIRE ROPE	5/16 304 STAINLESS 7X19	CYLINDER	2.5 BORE, 1 IN CHROME PLATED ROD
POWER UNIT	24V DC TANDEM HYDRAULIC	TUBE MATERIAL	6061-T6 ALUMINUM – CHANNEL & COVER (4 X 7-3/8 IN)
POWER SOURCE	DUAL 20W 12VDC SOLAR PANELS	HARDWARE	STAINLESS STEEL, BRASS LOCKNUTS
CRADLE BEAM MATERIAL	6061-T66 ALUMINUM EXTRUSION 5.75 x 2.12 IN	HYDRAULIC FITTINGS	QUICK CONNECT STAINLESS COUPLERS - 3/8 PIPE NPT ISO 7241-A

LTPM608A includes:

- Port & starboard lift tube assemblies
- Built in piling brackets
- 4' (1.2m) Hydraulic hose sets on each tube with quick coupling

PLF144-128A includes:

- Cradle frame assembly

HA0129 includes:

- Boat support bunk assembly

Pilings and extension hoses are not included