
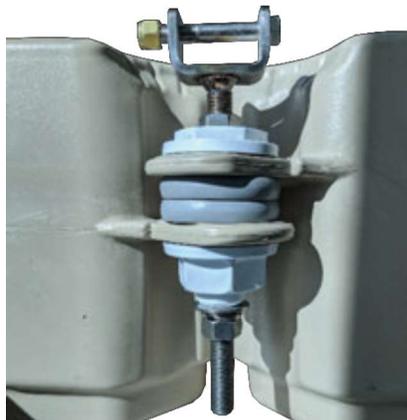


CANDOCK HINGES

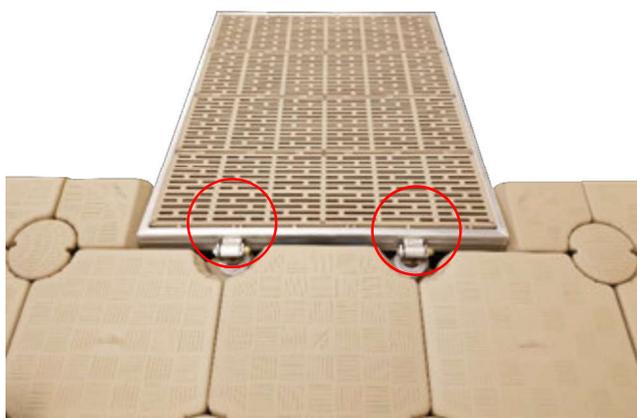

SPECIFICATIONS

Material/Composition: 6005 T-61 Marine grade aluminum, UHMW bushings, stainless-steel and brass hardware (1" 3/16 Nut)

Needed tools: 3/4" ratchet socket and wrench (for the pivot point), and a 5/16" Hex key.

*Hardware is included

**The hardware of this product is made of stainless steel and brass. If you are installing this product in a salty environment, or if there is a risk of corrosion, replace brass components with stainless steel ones. Don't forget to apply anti-seize grease to the nuts.

SKU NUMBERS

MODULAR HINGES (PAIR): C05-000032

DESCRIPTION

Utilizing a simple pivoting system and height-adjustable threaded rods, we can allow a gangway to be firmly secured on the edge of a Candock dock while allowing for smooth upwards and downwards movements of the dock and gangway assembly to follow the fluctuations of the water levels. Usually, we include our SHORE-END PILE BRACKETS at the gangway's shore-end, allowing a second pivoting point on the entire assembly. Such configurations are often ideal on smooth sandy/grassy shorelines.

They are preferred for light-duty residential applications. **Assembly required.**

ASSEMBLY PROCEDURE - THE MODULAR GANGWAY CANDOCK HINGES

See instruction video:

https://www.youtube.com/watch?v=MPIWii0-r7Y&list=PLmLmDtH9FZgCJBbUSVaBxIWi_7XCzh6H2&index=9&t=45s