




SK5310366

Relay Replacement for ShoreScreens No Harness

Important points before making electrical connections:


1. Unplug main power disconnect BEFORE replacing any components.

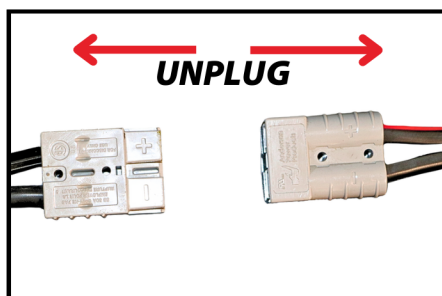

2. Ensure **RED is always on POSITIVE**, and **Black is always on NEGATIVE** (at both the relay and the battery).
3. DO NOT plug in the main power disconnect prior to making all ring terminal connections at the relay and the battery.

***Failure to adhere to either of these steps could lead to a blown fuse and potential equipment damage.

1. Replace the Relay

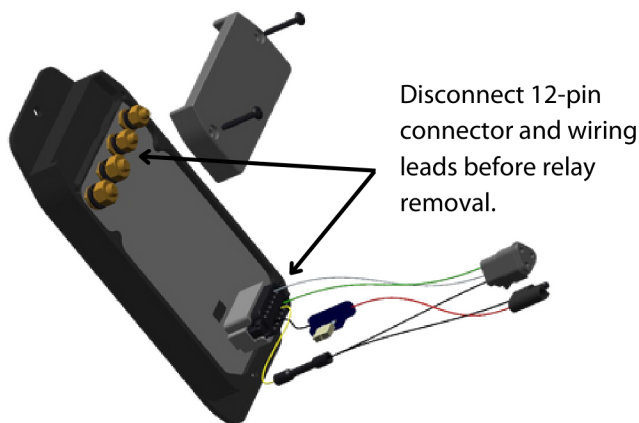


ShoreLandr® | ShoreStation® | ByronSELECT™

www.shorestation.com

2. Mount New Relay to Canopy Frame

3. Reconnect 12-pin Connector to Relay

4. Reconnect Wiring Leads

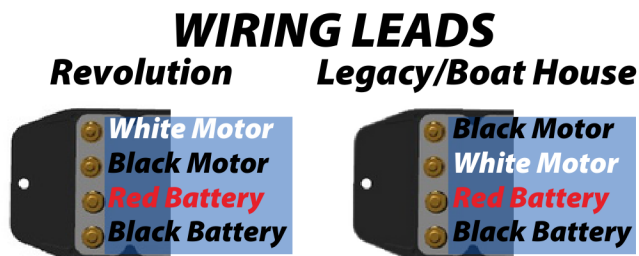

5. Install the Fuse - this kit comes with a fuse that may not have been installed with your previous relay. The provided fuse is now required for installation.




Provided 100A Fuse and Fuse Holder

Identify the existing cable at the battery (or batteries) that is powering the ShoreScreen relay. Loosen and temporarily remove the red power cable from the positive battery terminal. The black cable on the negative terminal can remain hooked up.

Connect the fuse holder provided with Service Kit to the positive terminal of the battery. Ensure the 100A fuse provided in this Service Kit is still in place on top of the fuse holder.

- If there is an additional existing fuse connected to the positive terminal of the battery (i.e. a fuse for the pump to a ShoreStation lift), do not remove it. Simply install the 100A fuse and holder on the same battery terminal. See image to right.

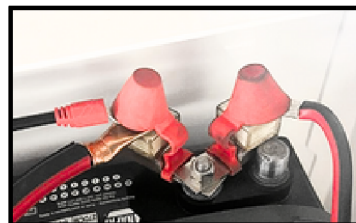

Reconnect the red power cable on top of the new 100A fuse.

Once all connections have been made and confirmed correct at both the battery and the relay, the main power disconnect can be plugged back in. See Wireless Remote Pairing Instructions (doc# 0004727) on how to pair remote to replacement relay.



MIDWEST IND.

ShoreLandr® | ShoreStation® | ByronSELECT™

www.shorestation.com