
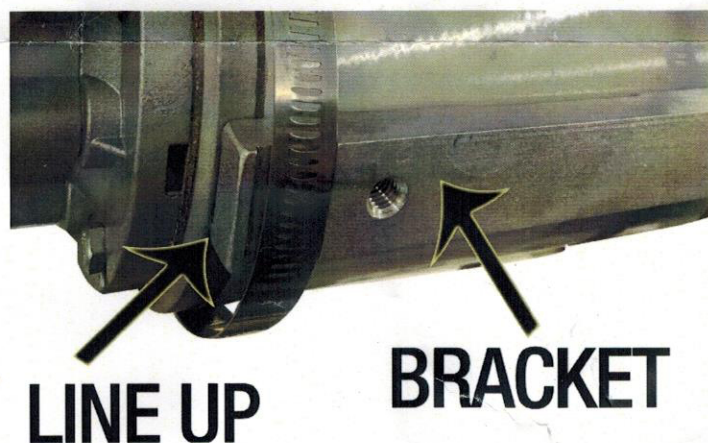


## Cover Installation Guide

1. If Needed Remove Zip Tie on Cord. (older models only)
2. Install Hose Clamps Around the Motor Making Them Accessible From the Back of the Motor. Do Not Tighten.
3. Slide Bracket Inside the Hose Clamps and Line Bracket Up With the Edge of the motor. Make sure Hose Clamps go in the Bracket Grooves.

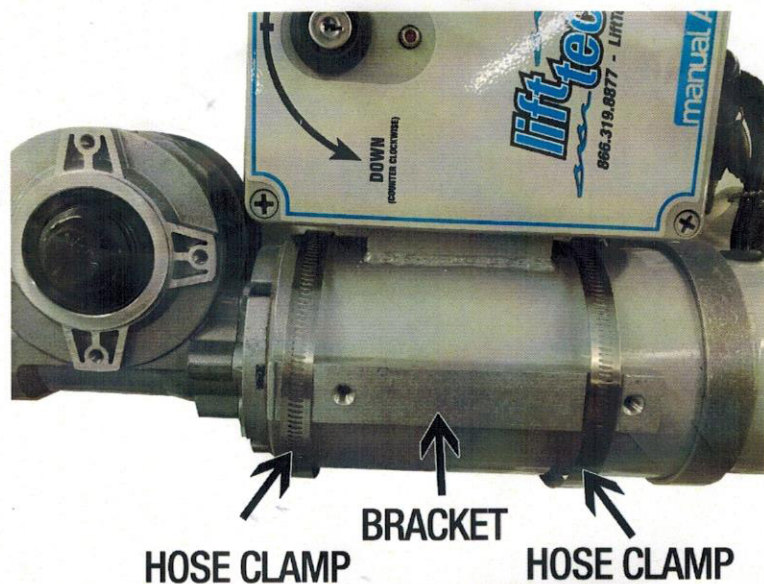

4. Install Cover by Tightening the Thumb Screws to the Bracket. Move Cover to Desired Location and Then Tighten Hose Clamps.

**Note:** If the Cover Rubs on the Inside of the Black Motor Bolt, Loosen the Thumb Screws Slightly.